

Radial Clearance - C3


Noise - Z2V2

High temperature grease

Type

EC - Outer ring with 2 tolerance rings

NP - Outer ring with retaining rings

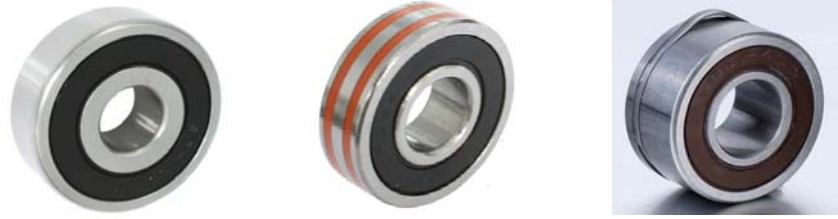

C&H	Basic Dimensions (mm)				Load rating (KN)		Limiting speeds(r/min)			
	d	D	B	r smin	Cr	Cor	Grease		Oil	
							Non-contact	contact		
NPB8-74D	8	22	11	0.3	3350	1370	32000	28000	37000	
NPB8-79D		23	11	0.3	3910	1530	34000	30000	40000	
ECB8-79D		23	11	0.3	3910	1530	34000	30000	40000	
NPB8-85D		23	14	0.3	3910	1530	34000	30000	40000	
ECB8-85D		23	14	0.3	3910	1530	34000	30000	40000	
EC6000-2RS	10	26	8	0.3	4570	1970	30000	22000	36000	
62000-2RS		26	10	0.3	4570	1970	30000	22000	36000	
ECB-50D		27	11	0.3	4570	1970	30000	22000	36000	
NPB10-50D		27	11	0.3	4570	1970	30000	22000	36000	
6201-2RS	12	32	10	0.6	6160	2770	22000	17000	28000	
214		35	18	0.6	7750	3570	20000	14000	24000	
6301-2RS		37	12	1	9700	4200	20000	15000	24000	
B12-40D		40	12	1	9700	4200	20000	15000	24000	
B12-53D		40	10	0.6	7690	3830	20000	14000	24000	
366	15	32	11	0.3	5600	2840	23000	14000	28000	
6202-2RS		35	11	0.6	7750	3570	20000	14000	24000	
EC6202-2RS		35	11	0.6	7750	3570	20000	14000	24000	
279		35	13	0.6	7750	3750	20000	14000	24000	
B15-69		35	13	0.6	7750	3750	20000	14000	24000	
NPB15-69		35	13	0.6	7750	3750	20000	14000	24000	
SC0299ZLU		38	12	0.6	7750	3750	20000	14000	24000	
348	15	38	19	0.6	7750	3750	2000	14000	24000	
B15-85D		40	14	0.6	9550	4800	17000	12000	20000	
319-2RS		43	13	1	11400	5450	17000	13000	20000	
B15-45D		45	14	1	13580	6590	15000	11000	18000	
336		46	14	1	13580	6590	15000	11000	18000	
NP336		46	14	1	13580	6590	15000	11000	18000	
B15-86D		47	14	1	13580	6590	15000	11000	18000	
B15-83D		47	18	1	13580	6590	15000	11000	18000	
6302-2RS		42	13	1	11400	5450	17000	13000	20000	
EC6302-2RS		42	13	1	11400	5450	17000	13000	20000	
382		52	16	1	15930	7875	14000	10000	17000	
6203-2RS		17	40	12	0.6	9550	4800	17000	12000	20000
EC6203-2RS			40	12	0.6	9550	4800	17000	12000	20000
6303-2RS	47		14	1	13580	6590	15000	11000	18000	
B17-107D	47		18	1	13580	6590	15000	11000	18000	
6303/24-2RS	47		24	1	13580	6590	15000	11000	18000	
B17-52	52		15	1.1	15930	7875	14000	10000	17000	
333	52		16	1.1	15930	7875	14000	10000	17000	
B17-99D	52		17	1.1	15930	7875	14000	10000	17000	
B17-116D	52		18	1.1	15930	7875	14000	10000	17000	