



3000 , 3200 , 3300 , 3800 , 3900

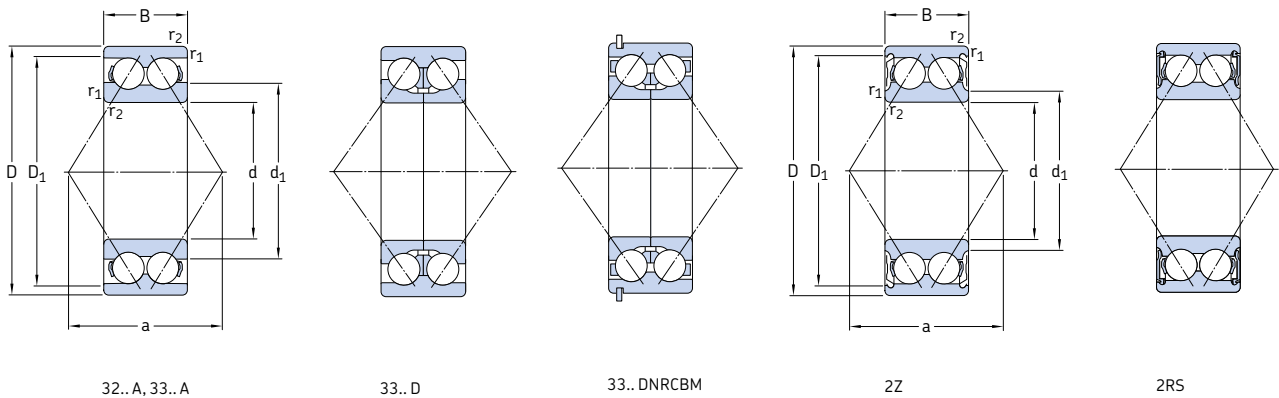


shaft	Bearing No Open	Dimensions(mm)			Load ratings(KN)		Limited Speed(rpm)		Weight ≈kg
		d	D	B	Dynamic	Static	Grease	Oil	
5	30/5	5	14	7	1.181	0.95	20000	25000	0.008
6	30/6	6	17	9	3.1	1.4	20000	25000	0.01
7	30/7	7	19	10	3.65	1.7	20000	25000	0.012
8	30/8	8	22	11	5.2	2.61	20000	25000	0.02
10	3000	10	26	12	5.5	3.2	18000	23000	0.022
	3200	10	30	14.3	7.5	4.3	16000	21000	0.05
12	3001	12	28	12	6.1	3.7	17000	22000	0.025
	3201	12	32	15.9	9	4.9	14000	19000	0.058
15	3002	15	32	13	8.5	5.4	14500	18000	0.036
	3202	15	35	15.9	10	6	11000	16000	0.066
	3302	15	42	19	14	8	10000	15000	0.13
17	3003	17	35	14	9	6	12500	16000	0.042
	3203	17	40	17.5	12.7	7.8	9000	14000	0.096
	3303	17	47	22.2	17.3	10.4	8000	12000	0.18
20	3804	20	32	10	4.9	3.9	13000	14300	0.02
	3904	20	37	13	9.3	6.6	12000	13200	0.046
	3004	20	42	16	14.2	9.6	11000	13000	0.08
	3204	20	47	20.6	19	12.1	8000	12000	0.16
	3304	20	52	22.2	19	12.3	8500	12000	0.22
25	3805	25	37	10	5.5	4.9	11500	12700	0.025
	3905	25	42	13	9.6	7.5	11000	12300	0.062
	3005	25	47	16	15.2	11	9500	12000	0.1
	3205	25	52	20.6	20.6	13.9	7500	10000	0.19
	3305	25	62	25.4	27.6	17.8	7500	10000	0.367

3000 , 3200 , 3300 , 3800 , 3900

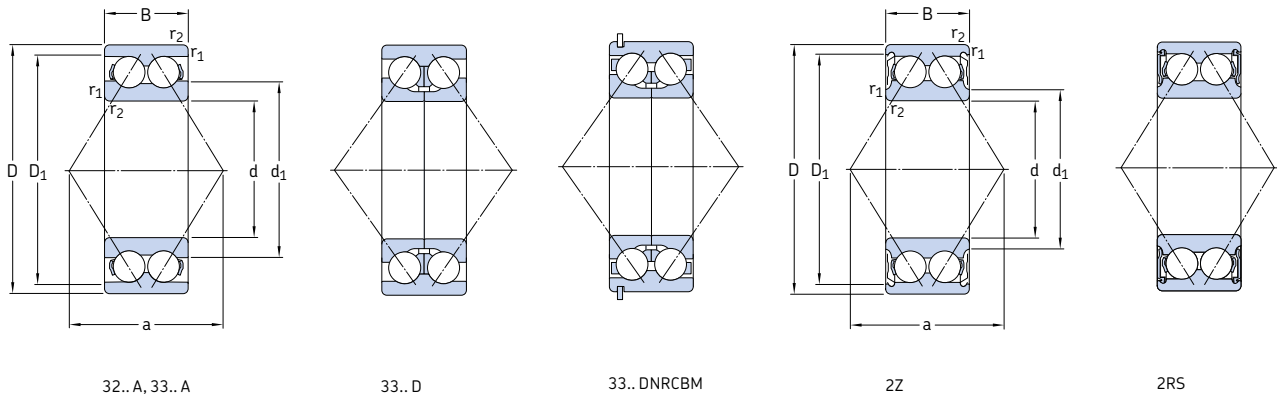


shaft	Bearing No Open	Dimensions(mm)			Load ratings(KN)		Limited Speed(rpm)		Weight ≈kg
		d	D	B	Dynamic	Static	Grease	Oil	
30	3806	30	42	10	5.7	5.6	10000	11500	0.03
	3906	30	47	13	9.9	8.3	9500	10500	0.095
	3006	30	55	19	20.3	15.5	8000	10000	0.16
	3206	30	62	23.8	25.7	18.5	6300	8500	0.31
	3306	30	72	30.2	37.2	25.9	6000	8000	0.59
35	3807	35	47	10	6.1	6.2	8500	10000	0.035
	3907	35	55	15	12.9	11.3	8000	9500	0.138
	3007	35	62	20	24.2	20.4	6500	8500	0.24
	3207	35	72	27	30.4	23.5	5600	7500	0.51
	3307	35	80	34.9	46.1	35.3	5300	7000	0.82
	3307DJ1	35	80	34.9	46.1	35.3	5300	7000	0.82
40	3808	40	52	10	6.4	6.9	7000	8500	0.04
	3908	40	62	16	17.4	15.8	6500	8000	0.158
	3008	40	68	21	24.5	20.8	6000	7800	0.279
	3208	40	80	30.2	40.8	30.2	5300	7000	0.64
	3308	40	90	36.5	54.9	40.1	4800	6300	1.06
	3308DNRCBM	40	90	36.5	54.9	40.1	4800	6300	1.06
45	3809	45	58	10	6.7	7.7	6300	7000	0.055
	3909	45	68	16	17.9	17.2	6000	6800	0.183
	3009	45	75	23	39.3	36.4	5600	6200	0.364
	3209	45	85	30.2	42.8	34.5	4800	6300	0.72
	3309	45	100	39.7	72.1	52	4300	5600	1.24
	3309DNRCBM	45	100	39.7	72.1	52	4300	5600	1.24
50	3810	50	65	12	7	8.4	6000	7500	0.075
	3910	50	72	16	19.1	19.6	5800	7200	0.189

3000 , 3200 , 3300 , 3800 , 3900

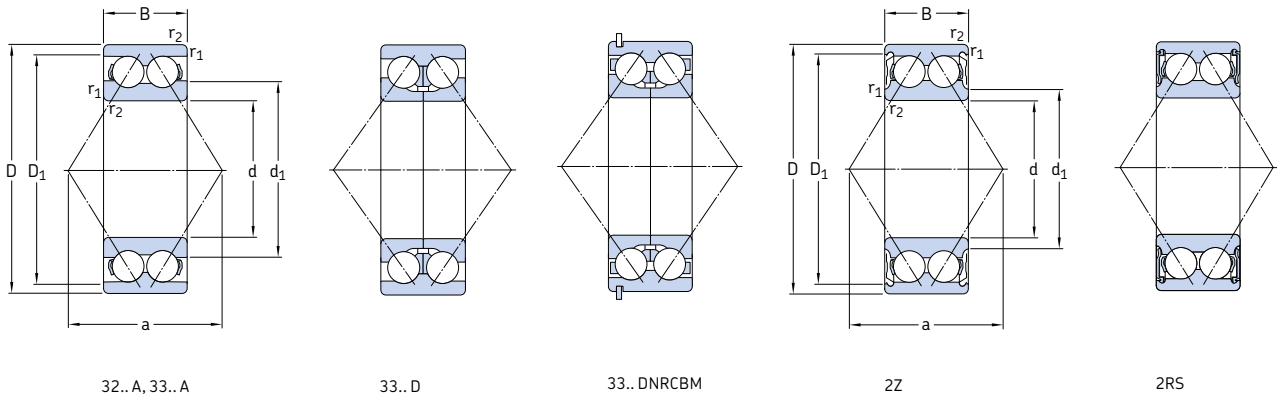

shaft	Bearing No Open	Dimensions(mm)			Load ratings(KN)		Limited Speed(rpm)		Weight ≈kg
		d	D	B	Dynamic	Static	Grease	Oil	
50	3010	50	80	23	42.3	41.9	5300	6600	0.395
	3210	50	90	30.2	43.2	35.3	4500	6000	0.78
	3310	50	110	44.4	84.9	62.6	4000	5300	1.96
	3310DNRCBM	50	110	44.4	84.9	62.6	4000	5300	1.96
	3310DMA	50	110	44.4	84.9	62.6	4000	5300	1.96
55	3811	55	72	13	12.8	14.4	5500	6500	0.01
	3911	55	80	19	20	21.7	5300	6200	0.282
	3011	55	90	26	43.7	44.7	4800	5800	0.581
	3211	55	100	33.3	53.9	47.2	4000	5300	1.03
	3311	55	120	49.2	106.3	82	3600	4800	2.4
	3311DNRCBM	55	120	49.2	106.3	82	3600	4800	2.4
	3311DMA	55	120	49.2	106.3	82	3600	4800	2.4
60	3812	60	78	14	13.6	16.2	5000	5500	0.14
	3912	60	85	19	21	23.8	4800	5300	0.303
	3012	60	95	26	47.2	53.4	4400	5000	0.621
	3212	60	110	36.5	61.3	52.6	3800	5000	1.4
	3312	60	130	54	121.4	95.1	3400	4500	3.24
65	3813	65	85	15	15.1	18.3	4700	5200	0.182
	3913	65	90	19	21.4	24.8	4500	5000	0.324
	3013	65	100	26	49.5	59.2	4000	4800	0.661
	3213	65	120	38.1	73.4	66.6	3400	4500	1.84
	3313	65	140	58.7	137.5	109.6	2800	3700	2.9
	3311DNRCBM	65	140	58.7	137.5	109.6	2800	3700	2.9
70	3814	70	90	15	18	21.9	4400	4800	0.19
	3914	70	100	23	25.8	30	4000	4600	0.516
	3014	70	110	30	54.2	58.9	3600	4400	0.95
	3214	70	125	39.7	80.5	73.8	3200	4300	1.98
	3314	70	150	63.5	154.5	125.1	2800	3800	4.7

3000 , 3200 , 3300 , 3800 , 3900

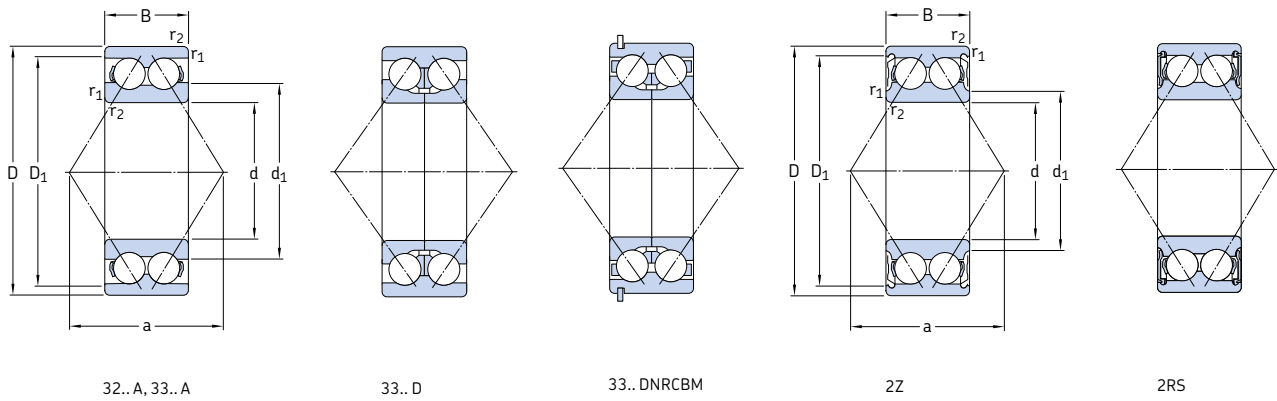

shaft	Bearing No Open	Dimensions(mm)			Load ratings(KN)		Limited Speed(rpm)		Weight ≈kg
		d	D	B	Dynamic	Static	Grease	Oil	
75	3815	75	95	15	16	20.3	4200	4700	0.224
	3915	75	105	23	26	31.3	3800	4300	0.546
	3015	75	115	30	57.7	66.5	3400	4000	1.003
	3215	75	130	41.3	87.9	81.4	3000	3600	2.01
	3315	75	160	68.3	171.4	134.8	2600	3200	6.3
80	3816	80	100	15	16.5	21.7	4000	4400	0.23
	3916	80	110	23	26.7	32.5	3500	4000	0.576
	3016	80	125	34	63.5	67.8	3100	3800	1.38
	3216	80	140	44.4	103.7	97.5	2800	3600	2.48
	3316	80	170	68.3	190.1	151.7	2400	3400	7.21
85	3817	85	110	19	22	28.7	3600	4000	0.407
	3917	85	120	26	31.5	38.5	3300	3700	0.821
	3017	85	130	34	68.3	77.5	2900	3600	1.447
	3217	85	150	49.2	111.8	106.4	2400	3500	3.2
	3317	85	180	73	189.4	234.5	2200	3200	8.3
90	3818	90	115	19	23.3	30.8	3300	3600	0.45
	3918	90	125	26	32.1	40.1	3100	3400	0.861
	3018	90	140	37	69.8	77.3	2700	3300	1.872
	3218	90	160	52.4	111.8	106.4	2400	3200	4.5
	3318	90	190	73	230.6	193.3	2000	3000	9.23
95	3819	95	120	19	23.6	31.8	3200	3500	0.501
	3919	95	130	26	32.6	41.7	3000	3300	0.901
	3019	95	145	37	72.4	82.9	2600	3100	1.954
	3219	95	170	55.6	145	198.7	2200	3000	5.01
100	3820	100	125	19	23.7	32.8	3100	3400	0.56
	3920	100	140	30	37.9	48.5	2800	3200	1.27
	3020	100	150	37	74.7	88.2	2500	2800	2.04
	3220	100	180	60.3	185	172	2000	2500	5.82